




# Industrial Computing

260 Bear Hill Road • Waltham, Massachusetts 02451  
 Tel. (781) 890-3111 • Fax: (781) 890-7117  
 www.industcomputing.com



## FP-AM 15 15" TFT LCD Color Monitor

FP-AM 15			
Viewing Area	15"		
Touch Panel	NO	YES(ELO)	NO
Strengthen Glass	NO	NO	YES
Pixel Pitch	0.297 X 0.297 mm		
Resolution	1024 X 768 XGA		
Effective Display Area	304.1 X 228.1mm		
Color	266,144		
Response Time(tr/tf)	5/11ms		
Contrast Ratio	400:1		
Brightness	250 cd/m <sup>2</sup>		
View Angle	T:40° B:60° L:60° R:60°		
Backlight	2 CCFL		
Lamp Life	50000 hrs		
Input Signal	Analog VGA & Video (Composite Video System PAL/NTSC/SECAM)		
Input Connector	D-Sub 15Pin, BNC Jack, S-VHS Din Type		
Scan Frequency	H: 31.5~60KHz / V: 56~75Hz		
Control	OSD		
Power Adaptor Input & Output	Universal AC 100~240 V, 50/60Hz & DC12V		
Power Input	DC 12V, 20~36V / 2A		
Power Management	VESA DPMS Standard		
Consumption	35W / Stand by 2.5 w		
Operating Temperature/Humidity	0 ~ 50°C / 10 ~ 85%RH		
Storage Temperature/Humidity	-20 ~ 60°C / 10 ~ 90%RH		
Sync Signal	TTL Level +/- Polarity		
Scanning	Non-Interlace		
Dimension (mm) (WxHxD)	379.4 x 285.4 x 53	379.4 x 285.4 x 57	
Net Weight (Kg)	3.9	5	
Safety & EMI	CE (EMC+LVD) / FCC / ETL		
Vibration	10Hz / One-way 1m/m		
Pixel (MHz)	78.75 MHz		
Content	LCD Monitor, Key Pad, Power Adaptor, VGA Cable		

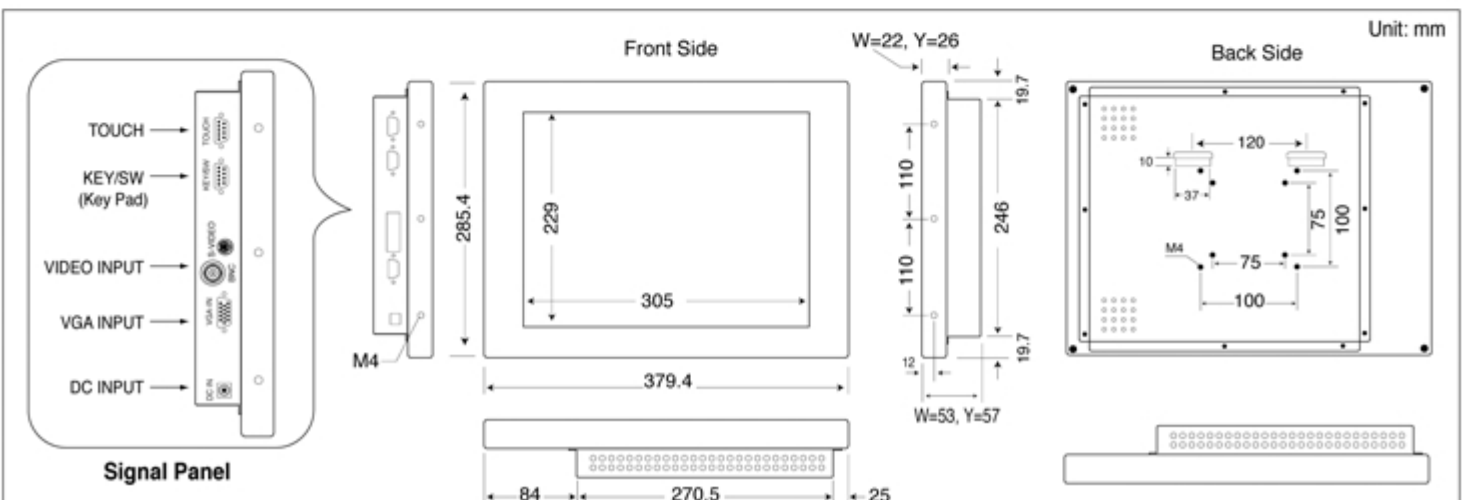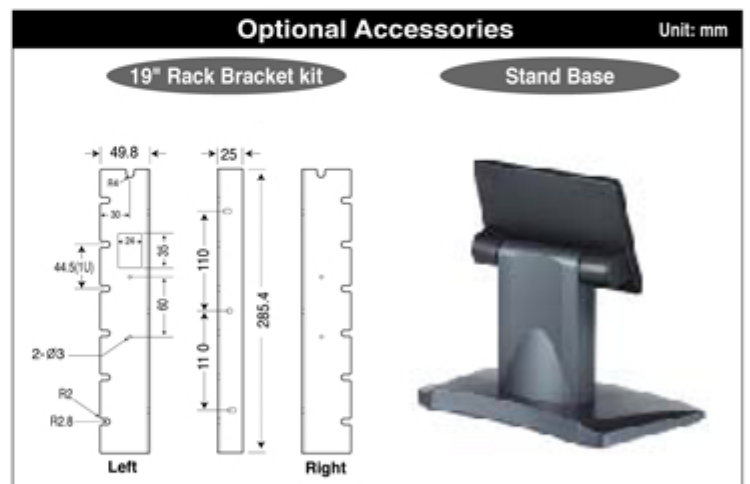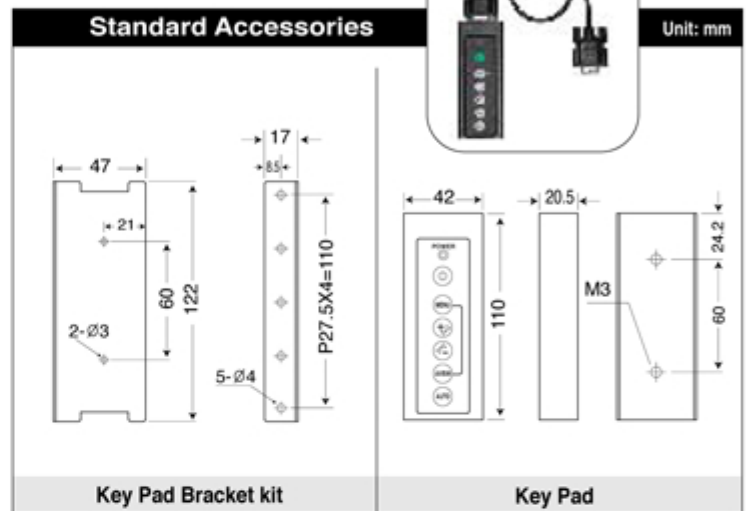

Specification subject to change without notice.