


**Industrial
Computing**

Guardian Industrial Panel Mount Systems



Industrial Computing's Guardian™ range of NEMA-4 rated industrial and military systems offer 8", 10", 15" and 17" flat panel displays. These systems include touch-screen and Gigabit Ethernet as standard features.

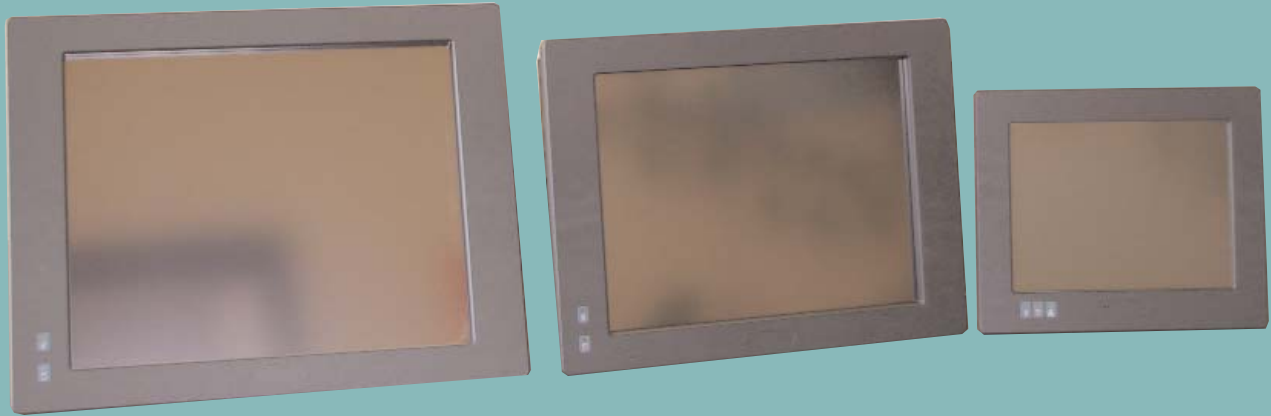

Outside Frame



Inside View



3/4 View



Back View

**Industrial
Computing**

260 Bear Hill Road
Waltham, MA 02451

Tel: (781) 890-3111
Fax: (781) 890-7117
www.industcomputing.com

	PM-P-8	PM-P-10	PM-P-15	PM-P-17
Display Type:	SVGA	SVGA	XGA	SXGA
Size (diagonal):	8.4"	10.4"	15"	17"
Max. Resolution:	800 x 600	800 x 600	1024 x 768	1280 x 1024
Pixel Pitch	0.213 x 0.213	0.264 x 0.264	0.297 x 0.297	0.264 x 0.264
Brightness (nits):	220	220	350	300
Response Time (Tr + Td):	35 ms	25 ms	16 ms	12 ms
Viewing angle: (up/down/left/right)	60/40/60/60	65/65/55/55	40/60/60/60	70/60/70/70
Standard CPU:	VIA Eden 733 MHz	Pentium 4, 1.2 GHz	Pentium 4, 1.2 GHz	Pentium 4, 1.2 GHz
Chipset:	VIA VT8606	Intel 855GME	Intel 845GV	Intel 845GV
Standard Supplied Memory:	512 MB	512 MB	512 MB	512 MB
Max System Memory:	512MB	1 GB	1GB	1GB
LAN Speed:	10M/100M/1G	10M/100M/1G	10M/100M/1G	10M/100M/1G
Sound:	AC'97 Codec	AC'97 Codec	AC'97 Codec	AC'97 Codec
USB:	2 x USB1.1	2 x USB 2.0	2 x USB 2.0	2 x USB 2.0
Keyboard/Mouse:	2	2	2	2
Line-in/Line-out/MIC	1/1/1	1/1/1	1/1/1	1/1/1
Parallel Port:	1	1	1	1
COM Port:	2	2	4	4
LAN:	1	1	1	1
VGA:	--	--	1	1
Digital I/O Port:	--	--	1	1
Standard Drive:	40 GB HDD (opt. 80 GB)	40 GB HDD (opt. 80 GB)	40 GB HDD (opt. 80 GB)	40 GB HDD (opt. 80 GB)
Optional add-on drives:	Compact Flash	Compact Flash	FDD, CD-RW/DVD Combo	FDD, CD-RW/DVD Combo
Touch Screen:	Analog Resistive	Analog Resistive	Analog Resistive	Analog Resistive
Construction:	Electro Galvanized Steel Chassis, Aluminum Front Bezel	Electro Galvanized Steel Chassis, Aluminum Front Bezel	Electro Galvanized Steel Chassis, Aluminum Front Bezel	Electro Galvanized Steel Chassis, Aluminum Front Bezel
Waterproof Level:	IP65 or NEMA4	IP65 or NEMA4	IP65 or NEMA4	IP65 or NEMA4
Wall Mount Type:	VESA standard	VESA standard	VESA standard	--
Power Supply:	DC 60W	ATX 1100W	ATX 200W	ATX 200W
Dimensions:	9.3" x 7.2" x 3.1" 236 x 180 x 80 mm	11" x 9.1" x 3.1" 280 x 232 x 80 mm	15.7" x 11.8" x 3.9" 400 x 300 x 100 mm	17.3" x 13.5" x 4.2" 440 x 344 x 107 mm
System Weight (Net):	11 lbs (5kg)	13.2 lbs (6kg)	20.9 lbs (9.5kg)	28.6 lbs (13kg)
Pre-loaded Operating System:	Windows XP Pro	Windows XP Pro	Windows XP Pro	Windows XP Pro
Optional Operating Systems:	Windows 98 SE/2000 Linux Redhat 8.0/9.0	Windows 98 SE/2000 Linux Redhat 8.0/9.0	Windows 98 SE/2000 Linux Redhat 8.0/9.0	Windows 98 SE/2000 Linux Redhat 8.0/9.0
Certificate:	CE, FCC, UL	CE, FCC, UL	CE, FCC, UL	CE, FCC, UL



260 Bear Hill Road
Waltham, MA 02451

Tel: (781) 890-3111
Fax: (781) 890-7117
www.industcomputing.com